



Digital Refractor PDR-7000

POTEC



Digital Refractor PDR-7000




SPECIFICATION

| | | |
|-------------------------|--|--|
| Sphere Power(SPH) | measurement range | -29.00 ~ +26.75D(general) -19.00 ~ +16.75D(cross cylinder or prism) |
| | measurement unit | 0.12D/0.25D/0.50D/1.00D |
| Cylinder Power(CYL) | measurement range | 0D ~ ±8.75D |
| | measurement unit | 0.25D/1D/2D/3D |
| Axis(AX) | measurement range | 0°~180° |
| | measurement unit | 1°/5°/15° |
| Interpupillary Distance | measurement range | 48 ~ 80mm, measurement distance, 35 ~ 70cm |
| | measurement unit | 0.5mm/1mm |
| Prism degree | measurement range | 0△ ~ 20△ |
| | measurement unit | 0.1△ /0.5△ /2△ |
| Prism angle | measurement range | 0°~360° |
| | measurement unit | 1°/5° |
| Cross cylinder | automatic cross cylinder(±0.25D) | |
| | 0.25D±cross cylinder 0.50D±cross cylinder | |
| Subsidiary Lens | P.D/cover/pin hole(Φ2mm)/polarized light filter(45°/135°) | |
| | madox road(right eye:horizontality, left eye:verticality) | |
| | red-green filter(right eye:red filter, left eye:green filter) | |
| | polarized light filter(right eye:135°,45°) (left eye:45°,135°) | |
| | seperation prizm(right eye:6△BU) (left eye:10△BU) | |
| Size | Refractor | 323-389(W)x245(D)x59(H)mm/ 3.7kg |
| | Controller | 260(W)x230(D)x58(H)mm/ 3.1kg(printer included) |
| | Junction box | 210(W)x190(D)x70(H)mm/ 2.1kg |

※ Design and specifications can be changed without prior notice for improvements.

SYSTEM NETWORKING

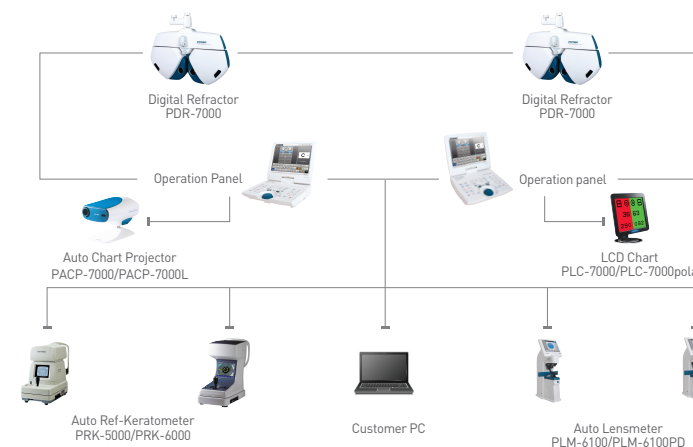

Support precise and various kinds of test

System Networking

Fast switching speed of the lens

Convenient control board

Various convenience functions

A wide range of viewing angle

Digital refractor PDR-7000 which is small and slim design and showing more powerful optometry performance provides precise and various tests conveniently.

Make smart technology yours



Digital Refractor PDR-7000



POTEC

POTEC Co., Ltd.
1324, Gwanpyeong-dong, Yuseong-gu,
Daejeon 305-509, Korea
Tel +82 42 632 3536 Fax +82 42 632 3537
webmaster@potec.biz www.potec.biz

Distributed by

www.potec.biz



Digital Refractor PDR-7000


optometry

- 1 Supply dual cross cylinder lens
Dual cross cylinder lens makes more accurate and easy astigmatism and proof test.
- 2 Automatic cover function
Since when reversing lens and switching mode, automatic cover function prevents intervention of accommodation force, easy and correct test is possible.
- 3 Congestion Control
Test can be done by the center of the lens eye test in window both presbyopia and nearsighted test.
- 4 Nearsightedness test of all kinds
Various target makes possible many kinds of nearsightedness test.
- 5 Various test method
PDR-7000 provides various muscle balance test methods such as Von Graefe Test, Schober Test, Madox Rod Test, etc.

design

- 1 Ergonomic design, provide wide viewing angle of 40-degree
Compact and thin size makes you test more conveniently because it covers small area of patient's face.
Test results can be secured practically and accurately due to wide range of viewing angle of 40 degree.
- 2 Forehead pedestal sensor
Forehead location detection, equipped with alert features such as indicating optimum face location for test, can check whether patients maintain correct posture or not.
- 3 Left / Right Independent PD Adjustment and fast speed of lens switching
As Left / Right PD adjusted independently, it enhances the reliability of test results and when using an eye chart, enough illumination can be obtained by using light.
In addition, as the fast lens switching speed minimizes eye control and eye fatigue that can be migrated during a test, the quality of optometry is improved.
- 4 Provide easy maintenance and upgrade
As the forehead pedestal, facial contact, and eyepiece protect lens which are designed detachable type can be removed and cleaned easily, you can always maintain hygiene test environment. In addition, the software can be upgraded easily through USB.

Digital Refractor PDR-7000

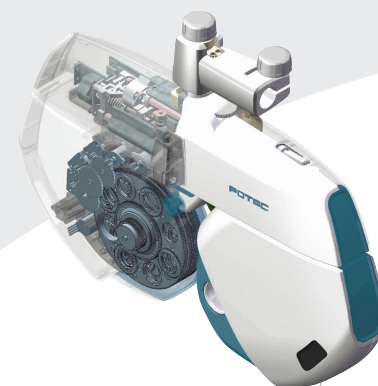

Tilting & Swivel Monitor

Touch Screen Monitor

Clicking Jog Dial

Vision Test



interface




- 1 Provide Tilting & Swivel monitor
Regardless of the position of the patient and the optometrist, the screen can be shared any angle and direction.
- 2 Provide large screen and convenient touch screen display
As progress of diagnose and figures are expressed in an 10.4 inch wide screen with intuitive interface and various colors, it is easy to understand and aware of the test contents, and due to adopting touch-screen, optometry progress can be progressed easily even if optometrists do not familiar with the operation.
- 3 Jog dial of click function and improved tact switch
Click function provides lens conversion and program execution much faster and conveniently and the voluminous keys arranged by function provide good touch sensitivity and improved durability.
- 4 Useful and convenient Vision Test features
Due to the useful Vision Test function, it is easy to explain to patients and make them understand about various refractive errors and diseases as well as near visual acuity with near eye chart and auxiliary eye chart, and eye charts can be selected depending on user's taste and the purpose.

Optometry System POS-7000

Drive automatically by one-touching the arm

90 degree rotated table

POS-7000, providing optimum testing environment under any conditions, is a simple and convenient compact unit table.



gross weight 200kg
table 145kg
chair 55kg

POTEC Optometry System

Potec's high-quality optometry system optimized for high-tech optometry equipment.

SPECIFICATION

| | |
|---------------------------|------------------------------|
| Size | 1,240(W)x1,151(D)x1,875(H)mm |
| Table size | 1,090(W)x480(D)x29(T)mm |
| Revolution angle of table | 90° |
| Head movement | 535mm(left-right) |
| Power arm s-axis movement | ±70mm |
| Chair up down movement | 180mm |
| Bulbs | 12V halogen |
| Power supply | 220V 5A |
| Power consumption | 300W (Max) |

※ Design and specifications can be changed without prior notice for improvements.

